


# DIAGRAM 7= SHOWING THE CONNECTION SYSTEMS NEEDED TO RE-PROGRAMME EITHER OF THE MEMORY UNITS.

MAINS SUPPLY

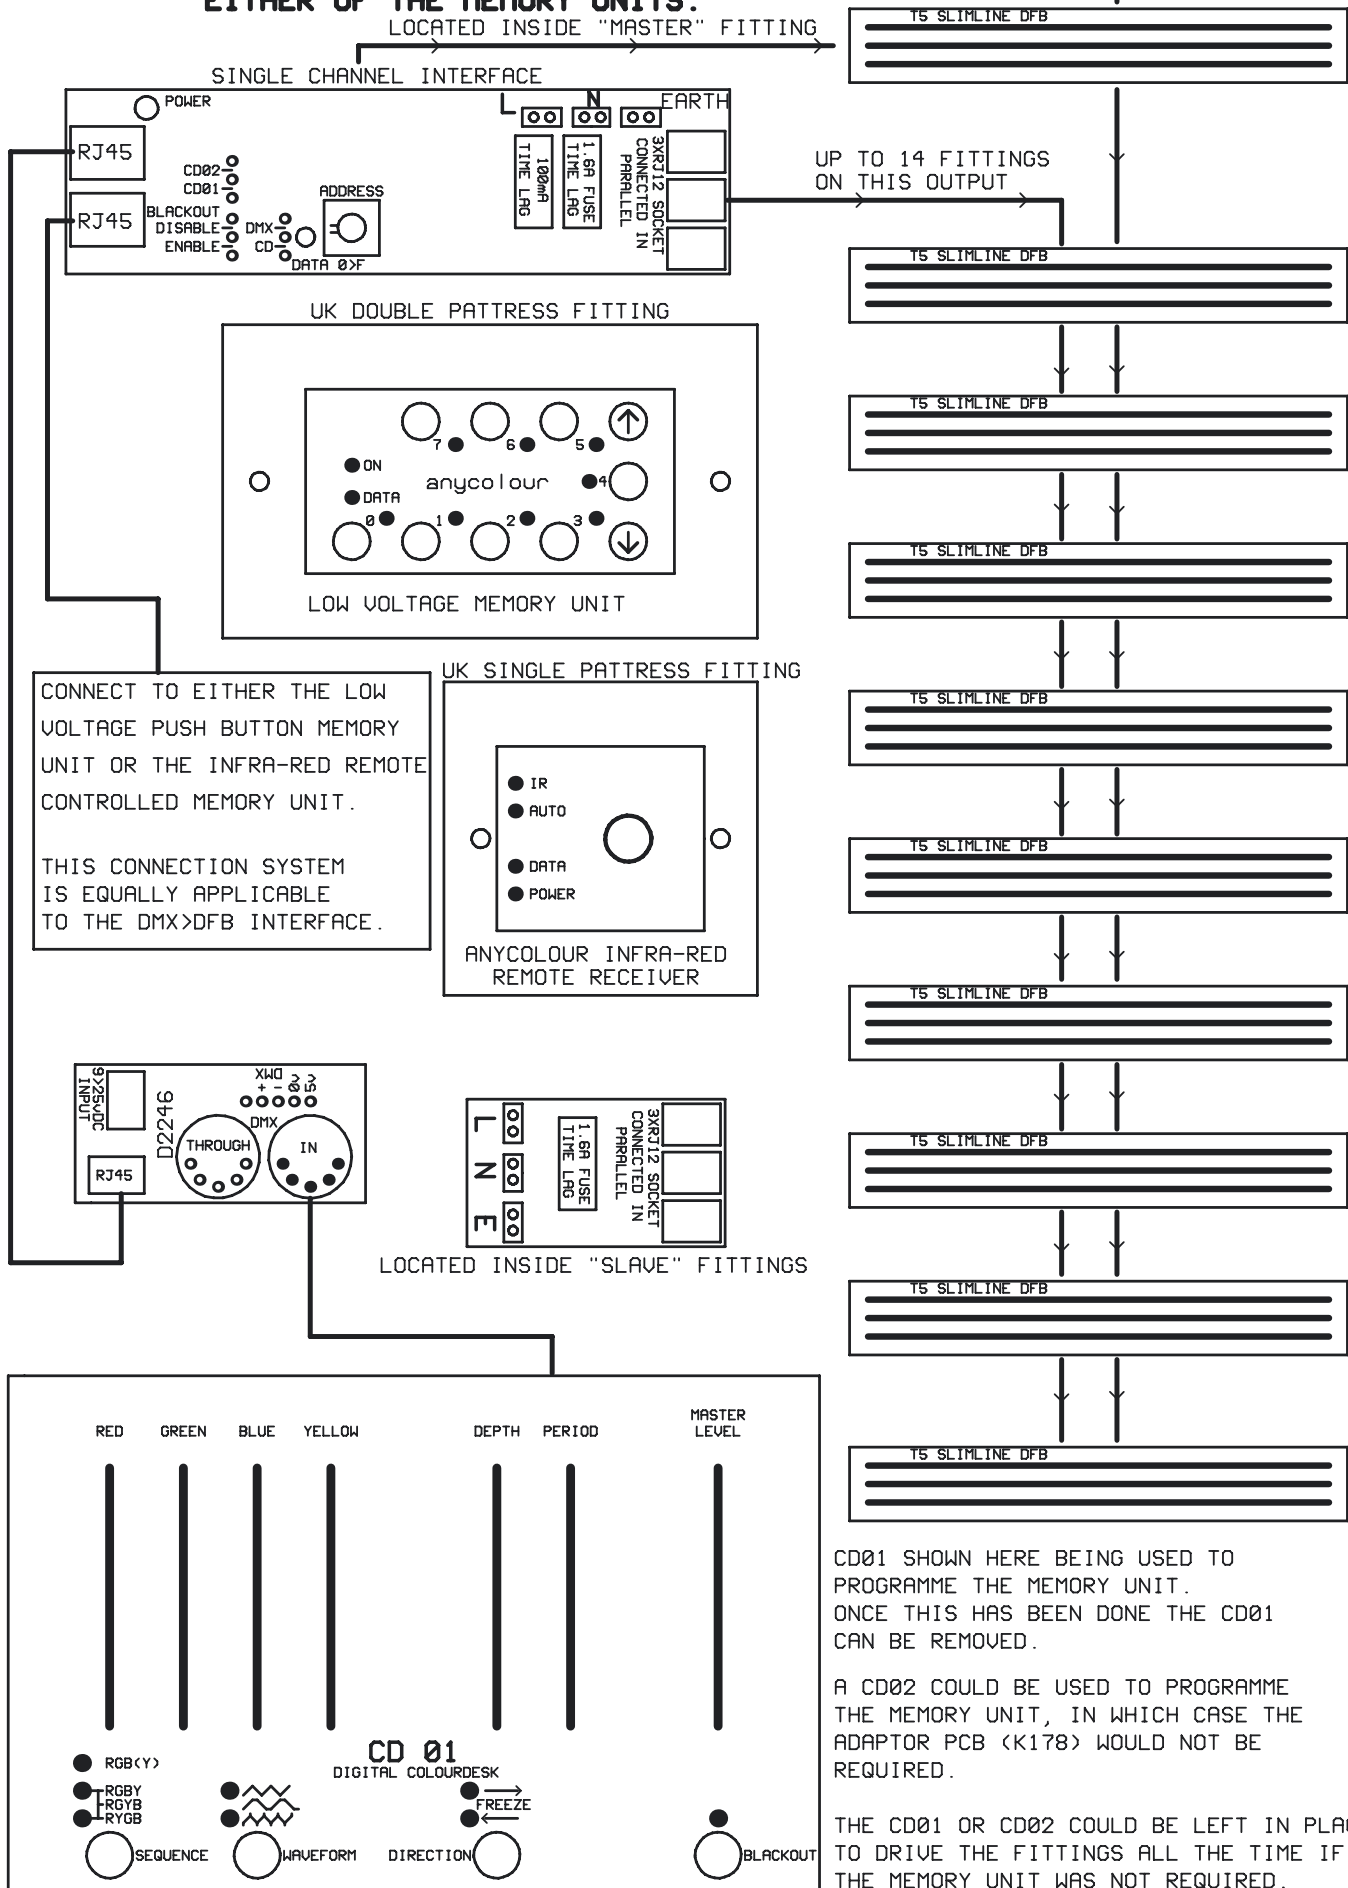

CD01 SHOWN HERE BEING USED TO PROGRAMME THE MEMORY UNIT. ONCE THIS HAS BEEN DONE THE CD01 CAN BE REMOVED.

A CD02 COULD BE USED TO PROGRAMME THE MEMORY UNIT, IN WHICH CASE THE ADAPTOR PCB (K178) WOULD NOT BE REQUIRED.

THE CD01 OR CD02 COULD BE LEFT IN PLACE TO DRIVE THE FITTINGS ALL THE TIME IF THE MEMORY UNIT WAS NOT REQUIRED.