




Colour Controlled Illumination from Anytronics

T5 SERIES DIGITAL  
FLUORESCENT BALLASTS



4 Way with coloured lamps

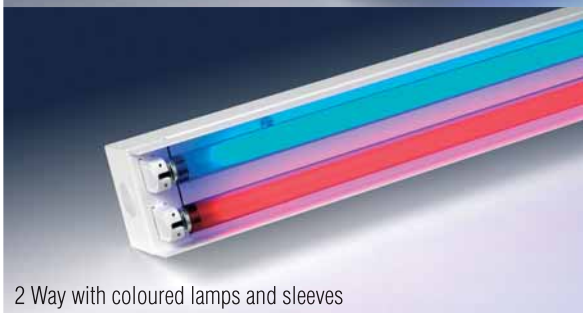

2 Way with coloured lamps and sleeves



3 Way with coloured lamps and sleeves

Optional end plate.

- Compact 2, 3 and 4 way HO colour control T5 fluorescent fittings.
- Digitally coded input control signals work over >200 m range.
- Digital input HF electronic ballasts give average lamp life expectancy of 20,000 + hours.



Further information available on our website [www.anycolour.com](http://www.anycolour.com)

Anytronics Limited, Units 5 & 6, Hillside Industrial Estate, London Road, Horndean, Hampshire, PO8 0BL

Tel: +44 (0)23 9259 9410 Fax: +44 (0)23 9259 8723 e-mail: [sales@anycolour.com](mailto:sales@anycolour.com)


© Anytronics Limited 2004. Anytronics and Anycolour are Registered Trademarks of Anytronics Limited. UK patents applied for. Anytronics reserve the right to change the specifications without notice at any time.

TV STUDIOS | THEATRE | SCHOOLS | CINEMA | ENTERTAINMENT | ARCHITECTURAL | OFFICES & RETAIL


# ANYCOLOUR T5 SERIES DIGITAL FLUORESCENT BALLASTS



3 Colour T5 DFB with no colour sleeves. Full colour control with high brightness.

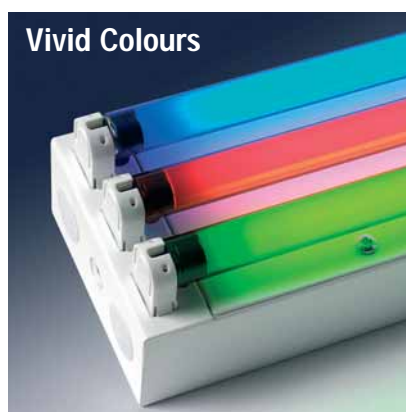

3 Colour T5 DFB with RGB colour sleeves. Full colour control with wide range of vivid colours.

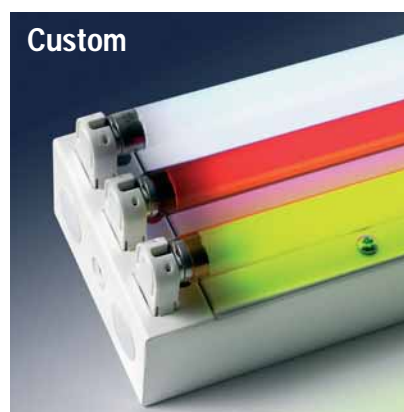

3 Colour T5 DFB with Red and Yellow colour sleeves and white lamp. Custom colour control with vivid colours.

## Anycolour DFB fittings for indoor use, options order code guide

Options	AC254	AC324	AC354	AC380	AC424	AC454	AC480
Flat shroud (SO)	✓	✓	✓	✓	✓	✓	✓
24 mm Shroud (S24)	✓	✓	✓	✓	✓	✓	✓
100 mm Shroud (S100)	✗	✗	✓	✗	✗	✗	✗
Hardwired version (H)	✓	✓	✓	✓	✓	✓	✓
Studio Format - Socketed plug and play version (SF)	✓	✓	✓	✓	✓	✓	✓
Slave (S) driven by colour desk CD01, AC005MP or AC006	✓	✓	✓	✓	✓	✓	✓
Master (M) capable of driving up to 15 Slave fittings @ 240 VAC or 10 Slave fittings @ 220 VAC	✓	✗	✓	✓	✗	✓	✓
Swivel Bracket screw option (SBS)	✓	✓	✓	✓	✓	✓	✓
Swivel Bracket handwheel (SBH)	✓	✓	✓	✓	✓	✓	✓
Studio Yoke (SY)	✗	✗	✓	✗	✗	✓	✗
Right Angle Bracket (RAB)	✗	✓	✓	✓	✗	✗	✓
Polycarbonate Safety Cover (PSC)	✗	✗	✓	✗	✗	✓	✗
Black Texture finish (BT) shroud finished in white	✓	✓	✓	✓	✓	✓	✓

## Specifications

Dimensions:	Length mm	1180	580	1180	1480	580	1180	1480
	Width mm	66	160	96	96	214	126	126
	Height mm	70	70	70	70	70	84	70
Fitting power and heat generated for thermal calculations @ 100% output (Watts)		108 W	72 W	162 W	240 W	96 W	216 W	320 W
Net Weight (kg)		-	-	4.3 kg	5.5 kg	-	5.4 kg	6.2 kg

## Optional extras for indoor DFB's

- 5 mm Polycarbonate safety cover (use with AC354 and AC454 fittings only).
- Perspex Diffuser (use with AC354 with 100 mm shroud only).
- Deep dyed polycarbonate sleeves are available in the following colours: Light Red, Red, Orange, Purple, Pink, Candy Pink, Candlelight, Acid Yellow, Chrome Green, Sky Blue, Ice Blue, Royal Blue and Lavender.
- 2 way fittings c/w two lamps (please specify colour).
- 3 way fittings c/w one each Red, Green and Blue lamp.
- 4 way fittings c/w one each Red, Green, Blue lamp and one white lamp c/w Acid Yellow sleeve. If sleeves are fitted, the light output will be reduced and a more vivid colour range produced.
- For use on Red, Green and Blue lamps in standard fittings we would recommend Light Red, Chrome Green and Sky Blue sleeves.
- Deep dyed polycarbonate sleeves used with white lamps will give a variety of alternative colour combinations (please specify if required).